

FedSender - AzureAD as IdP - setup guide (External)

- [Description](#)
- [Contact your Belnet Account Manager](#)
- [Microsoft Azure AD as Identity Provider \(IdP\) & Belnet FedSender as Service Provider \(SP\).](#)
 - [Prerequisites](#)
 - [Step 1: Create an Enterprise application in Azure AD](#)
 - [Step 2: Configure the Token encryption](#)
 - [Step 3: Manage Users and groups](#)
 - [Step 4: Configure the Single sign-on \(SAML\)](#)
 - [Step 5: Configure User Attributes & Claims](#)
 - [Step 6: SAML Signing Certificate \(Optional - only if you created a dedicated certificate for all your Azure AD applications\)](#)
 - [Step 7: Send/Provide your App Federation Metadata URL to Belnet](#)
 - [Step 8: Test Single sign-on with Belnet FedSender](#)

Description

In this document, we will give an example of how to configure an Azure AD as IdP (Identity Provider) for Single Sign On management on Belnet FedSender (acting as Service Provider).

This documentation is published on the Belnet website, section FedSender FAQ, to help Belnet customers configure/set up their Azure AD Identity Provider.

Contact your Belnet Account Manager


Belnet FedSender is a paid service.

Please contact your Account Manager before continuing with this documentation in order to subscribe to this service.

Microsoft Azure AD as Identity Provider (IdP) & Belnet FedSender as Service Provider (SP).

Prerequisites

- The Azure AD must be created with at least one (non-admin) user.
- [The Azure AD must have access to Token encryption and Single sign-on functionalities which are part of Azure AD Premium P1 or P2 subscription.](#)
- The Azure AD, the simpleSAMLphp and the FedSender server must have their respective domain and **SSL certificate generated and correct.**
- Both servers/service must be **reachable** from each other.

 For the time being, the Belnet FedSender service is not linked to a Belnet Federation.

However, we were investigating the feasibility and necessity of integrating this service into a new Federation for our Public Organizations customers (Federal, Regional, Municipals).

Please take note of the important note below for your Azure AD IdP setup:

Note about Azure AD application(s) certificates

A note about Azure AD application certificates

By default, Azure AD creates a new certificate per application. This is not a good idea, as you must have the same certificate for all applications in the same federation.

So, unless you know for sure that you will never use several applications of the Belnet federation, we strongly advice you to not use the default certificate created by Azure AD but rather create a dedicated certificate for all the Azure ID applications that you'll create.

Such a certificate, with a validity of 10 years, can easily be created using openssl with the following commands (please update the "-subj" field to whatever best suit you eg: "/C=BE/ST=BRUSSEL/L=BRUSSEL/O=ACME/OU=ICT/CN=AZUREAD"):

```
openssl req -x509 -newkey rsa:4096 -keyout key.pem -out cert.pem -sha256 -days 3650 -nodes -subj "/C=XX/ST=StateName/L=CityName/O=CompanyName/OU=CompanySectionName/CN=CommonNameOrHostname"
```


```
openssl pkcs12 -inkey key.pem -in cert.pem -export -out certificate.pfx
```

Note that you MUST use a passphrase for your .pfx file; an empty passphrase won't be accepted by Azure AD later.

Failure to do so means you'll have to modify your first application's certificate if ever you want to use a second service from the Belnet federation.

Step 1: Create an Enterprise application in Azure AD

- On Microsoft Azure Portal or [Azure Active Directory admin center](#) **Azure Active Directory** --> **Enterprise applications**
- Click on **New application**

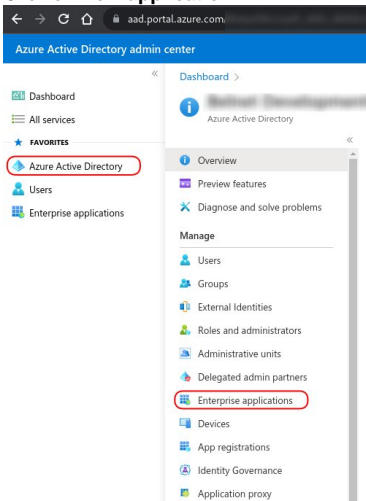

Dashboard > Enterprise applications > Enterprise applications

Enterprise applications | All applications

- Azure Active Directory

<< **+ New application** Refresh Download


Overview

- Overview** View, filter, and search applications in your organization
- Diagnose and solve problems** The list of applications that are maintained by your organization


Manage

Search by application name or object ID


- Click on **+ Create your own application**, enter **Belnet FedSender** in the **Name** field and click **Create**

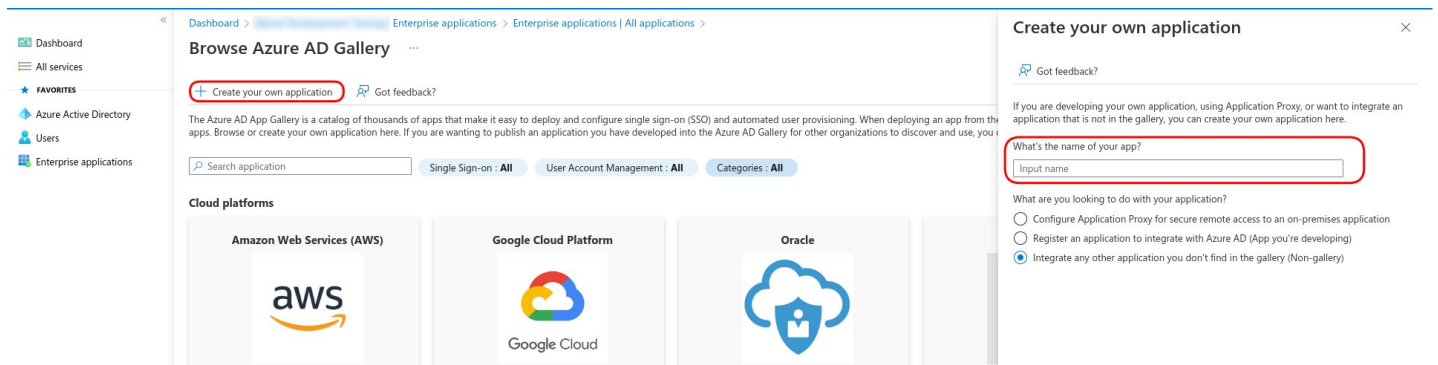

- Enter **Belnet FedSender** as your AppName in the field, then click **Add**
- Wait while Azure AD is adding the application

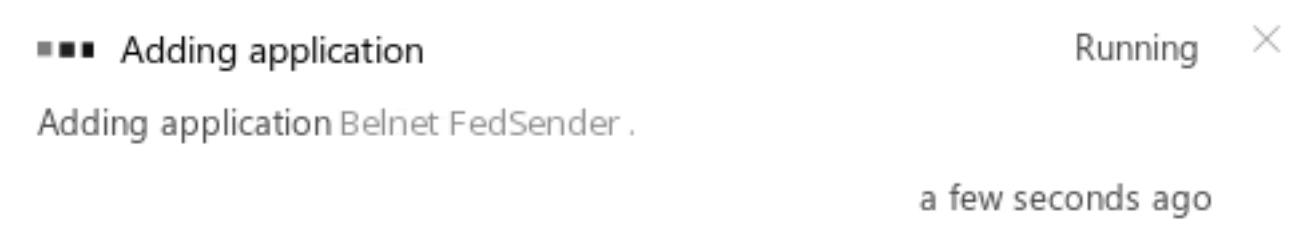

- After the application is added successfully, proceed to next step



Adding application



Application added successfully

a few seconds ago

Step 2: Configure the Token encryption

- Retrieve/Download now the Belnet Fedsender certificate used for metadatas:

This can be done in two different ways:

- by downloading the certificate itself on: <https://fedsender.belnet.be/fedsender.belnet.be-metadata-ss.crt> or
- by consulting SAML Metadata on the Service Provider itself (FedSender SP) at url: <https://fedsender.belnet.be/simplesaml/module.php/saml/sp/metadata.php/belnet-gcloud-idp>

certificate content is available within Tags <ds:X509Certificate> </ds:X509Certificate> .

- On Microsoft Azure Portal or [Azure Active Directory admin center](#) **Azure Active Directory --> Enterprise applications All Applications**
- Select** your newly created application named **Belnet FedSender**

Azure Active Directory admin center

Enterprise applications | All applications

Overview

View, filter, and search applications in your organization that are set up to use your Azure AD tenant as their Identity Provider.

The list of applications that are maintained by your organization are in [application registrations](#).

Manage

Search by application name or object ID

Application type == Enterprise Applications

Application ID starts with

Add filters

Name	Object ID	Application ID	Homepage URL	Created on	Certificate Expiry Status
Belnet FedSender	762c37e6-d5bf-42d3-b9cc-7b236b9...	45807681-033b-4ea3-bad0-c122d1b...	https://account.activedirectory.wind...	12/19/2022	

- Click on **Token encryption**, then click on **Import Certificate**
- Select the **certificate** fetched previously and click on **Add**

Azure Active Directory admin center

Belnet FedSender | Token encryption

Import Certificate

Upload a certificate with a file name extension .cer

fedsender.belnet.be-cert-metadata.pem

Add Cancel

Status	Key id	Start Date	Expiration Date	Thumbprint
--------	--------	------------	-----------------	------------

- Wait for the **successful** import of the certificate

Token Encryption (Preview)

Successful import of your token encryption certificate

a few seconds ago

- Click on the **3 dots button** and click on **Activate token encryption**

Import Certificate | Got feedback?

Please activate a certificate to enable token encryption

SAML token encryption enables the use of encrypted SAML assertions with an application that supports it. Encrypting the SAML assertions between Azure AD and the application provides additional assurance that the content of the token can't be intercepted, and personal or corporate data compromised. [Learn more.](#)

Status	Key Id	Start Date	Expiration Date	Thumbprint
Inactive		6/29/2022, 3:04:18 PM	6/28/2032, 3:04:18 PM	Thumbprint will not be displayed

Activate token encryption certificate
 Delete token encryption certificate
 Deactivate token encryption certificate

- Click on **Yes**

Import Certificate

Activate token encryption certificate

You are about to activate token encryption for your application. Please ensure that your certificate has been successfully onboarded on your application's site.

Yes No

- Verify the **successful** activation of the token encryption certificate

Token Encryption (Preview)

Successful activation of your token encryption certificate

a few seconds ago

Import Certificate | Got feedback?

Token encryption is enabled

SAML token encryption enables the use of encrypted SAML assertions with an application that supports it. Encrypting the SAML assertions between Azure AD and the application provides additional assurance that the content of the token can't be intercepted, and personal or corporate data compromised. [Learn more.](#)

Status	Key Id	Start Date	Expiration Date	Thumbprint
Active		6/29/2022, 3:04:18 PM	6/28/2032, 3:04:18 PM	Thumbprint will not be displayed




Monitor on your Tenant the expiration of the certificate!


To prevent or minimize outage due to a certificate expiring, use roles and email distribution lists to ensure that certificate-related change notifications are closely monitored.

Step 3: Manage Users and groups


- On Microsoft Azure Portal or Azure Active Directory admin center, go to **Azure Active Directory** **Enterprise applications** **All applications** **Belnet FedSender** Under **Manage** (Left Pane) **Users and groups**, click on **Add user**

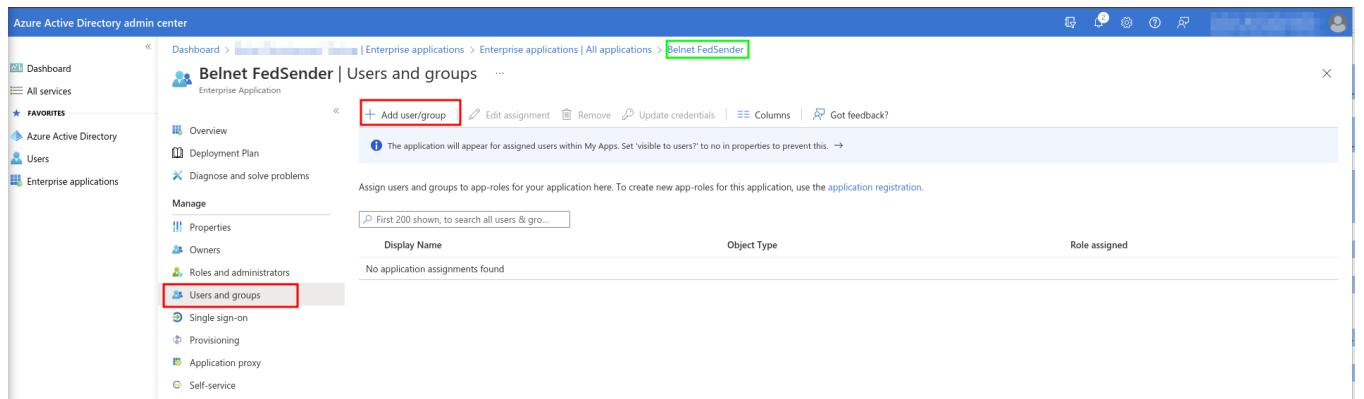


- Click on **User and groups**

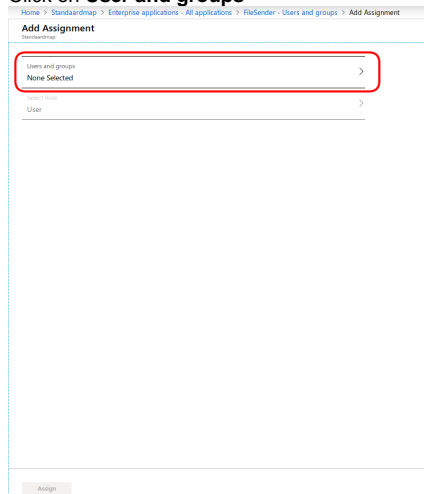

- For this example, we will select the group **fedsender** with user **beta** as member of. **Please adapt as it fits to your organisation.**

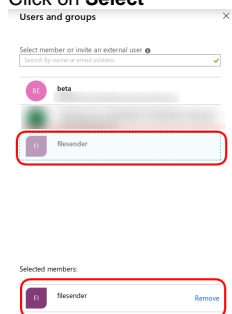


- Click on **Assign**

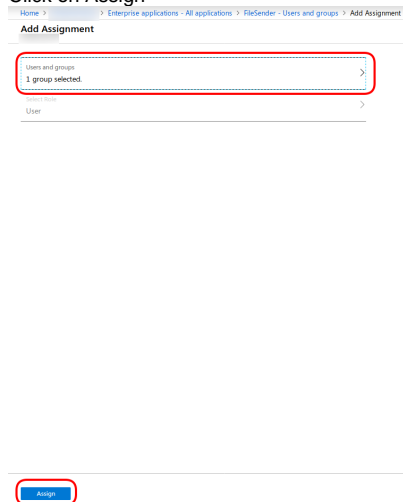

- Group **fedsender** has been assigned access (as **user**) to the **Belnet FedSender** application

✕



Application assignment succeeded


0 users & 1 group have been assigned access

a few seconds ago

+ Add user
✎ Edit
🗑 Remove
🔄 Update Credentials
☰ Columns

i The application will appear on the Access Panel for assigned users. Set 'visible to users?' to no in properties to prevent this. →

First 100 shown, to search all users & groups, enter a display name.

DISPLAY NAME	OBJECT TYPE	ROLE ASSIGNED
 filesender	Group	User

Step 4: Configure the Single sign-on (SAML)

- On Microsoft Azure Portal, go to **Azure Active Directory** **Enterprise applications** **All applications** **Belnet FedSender** **Manage** **Single sign-on**, click on **SAML**

Overview

Deployment Plan

Diagnose and solve problems

Manage

Properties

Owners

Roles and administrators

Users and groups

Single sign-on

Provisioning

Application proxy

Self-service

Custom security attributes (preview)

Security


Conditional Access

Permissions

Token encryption


Single sign-on (SSO) adds security and convenience when users sign on to applications in Azure Active Directory by enabling a user in your organization to sign in to every application they use with only one account. Once the user logs into an application, that credential is used for all the other applications they need access to. [Learn more.](#)

Select a single sign-on method [Help me decide](#)




Disabled

Single sign-on is not enabled. The user won't be able to launch the app from My Apps.




SAML

Rich and secure authentication to applications using the SAML (Security Assertion Markup Language) protocol.



Password-based

Password storage and replay using a web browser extension or mobile app.



Linked

Link to an application in My Apps and/or Office 365 application launcher.

- Download the Belnet FedSender metadatas from <https://fedsender.belnet.be/simplesaml/module.php/saml/sp/metadata.php/belnet-gcloud-idp> as an **.xml** file
- Click on **Upload metadata file**, select the **Belnet FedSender metadata xml file** and click on **Add**

«

[Upload metadata file](#)
[Change single sign-on mode](#)
[Test this application](#)
[Got feedback?](#)

Upload metadata file.

Values for the fields below are provided by Belnet FedSender. You may either enter those values manually, or upload a pre-configured SAML metadata file if provided by Belnet FedSender.

"belnet-gcloud-idp"

Add
Cancel

- If the metadata file upload is **successful**, you will get the **Basic SAML Configuration** with the fields **Identifier (Entity ID)** and **Reply URL (Assertion Consumer Service URL)** filled, click on **Save**

Save

Got feedback?

Identifier (Entity ID) *

The unique ID that identifies your application to Azure Active Directory. This value must be unique across all applications in your Azure Active Directory tenant. The default identifier will be the audience of the SAML response for IDP-initiated SSO.

https://fedsender.belnet.be

Default

✓

ⓘ

✕

Add identifier

Reply URL (Assertion Consumer Service URL) *

The reply URL is where the application expects to receive the authentication token. This is also referred to as the "Assertion Consumer Service" (ACS) in SAML.

https://fedsender.belnet.be/simplesaml/module.php/saml/sp/saml2-acs.php/belnet...

Index

0

Default

✓

ⓘ

✕

Add reply URL

Sign on URL (Optional)

Sign on URL is used if you would like to perform service provider-initiated single sign-on. This value is the sign-in page URL for your application. This field is unnecessary if you want to perform identity provider-initiated single sign-on.

Enter a sign on URL

✓

Relay State (Optional)

The Relay State instructs the application where to redirect users after authentication is completed, and the value is typically a URL or URL path that takes users to a specific location within the application.

Enter a relay state

Logout Url (Optional)

This URL is used to send the SAML logout response back to the application.

https://fedsender.belnet.be/simplesaml/module.php/saml/sp/saml2-logout.php/belnet-gcloud-idp

✓

- If the metadata file upload is **unsuccessful**, click on the **edit** button of **Basic SAML Configuration**

[Upload metadata file](#)
[Change single sign-on mode](#)
[Test this application](#)
[Got feedback?](#)

Set up Single Sign-On with SAML

Read the [configuration guide](#) for help integrating FileSender.

1

Basic SAML Configuration

Identifier (Entity ID)

Required

Reply URL (Assertion Consumer Service URL)

Required

Sign on URL

Optional

Relay State

Optional

Logout Url

Optional

- And fill the following fields:
Identifier (Entity ID): <https://fedsender.belnet.be>
Reply URL (Assertion Consumer Service URL): <https://fedsender.belnet.be/simplesaml/module.php/saml/sp/saml2-acs.php/belnet-gcloud-idp>
 Click on **Save**
- The system will ask you if you want to test Single sign-on with FileSender, click on **No, I'll test later** for now

[Upload metadata file](#)
[Change single sign-on mode](#)
[Test this application](#)
[Got feedback?](#)

Test single sign-on with FileSender

To ensure that single sign-on works for your application, we recommend using the testing capability (in the last step) to test the changes you recently made. Would you like to test now?

[Yes](#)
[No, I'll test later](#)

Step 5: Configure User Attributes & Claims

- Click on the **edit** button of **User Attributes & Claims**
Belnet FedSender | SAML-based Sign-on ...
Enterprise Application

Overview

Deployment Plan

Diagnose and solve problems

Manage

Properties

Owners

Roles and administrators

Users and groups

Single sign-on

Provisioning

Application proxy

Self-service

Custom security attributes (preview)

Security

Conditional Access

Permissions

Token encryption

<< < > >>

Upload metadata file

Change single sign-on mode

Test this application

Got feedback?

Set up Single Sign-On with SAML

An SSO implementation based on federation protocols improves security, reliability, and end user experiences and is easier to implement. Choose SAML single sign-on whenever possible for existing applications that do not use OpenID Connect or OAuth. [Learn more.](#)

Read the [configuration guide](#) for help integrating Belnet FedSender.

1

Basic SAML Configuration

Identifier (Entity ID) https://fedsender.belnet.be

Reply URL (Assertion Consumer Service URL) https://fedsender.belnet.be/simplesaml/module.php/saml/sp/saml2-acs.php/belnet-gcloud-idp

Sign on URL Optional

Relay State (Optional) Optional

Logout Url (Optional) https://fedsender.belnet.be/simplesaml/module.php/saml/logout.php/belnet-gcloud-idp

Edit

2

Attributes & Claims

givenname user.givenname

surname user.surname

emailaddress user.mail

name user.userprincipalname

Unique User Identifier user.userprincipalname

Edit

- Modify the **Additional claims** from

Home > Enterprise applications - All applications > FileSender - Single sign-on > SAML-based Sign-on > User Attributes & Claims

User Attributes & Claims

+ Add new claim + Add a group claim Columns

Required claim

CLAIM NAME	VALUE
Unique User Identifier (Name ID)	user.userprincipalname [nameid-format:emailAddress] ...

Additional claims

CLAIM NAME	VALUE
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/emailaddress	user.mail ...
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/givenname	user.givenname ...
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/name	user.userprincipalname ...
http://schemas.xmlsoap.org/ws/2005/05/identity/claims/surname	user.surname ...

- To:

User Attributes & Claims

+ Add new claim + Add a group claim Columns

Required claim

CLAIM NAME	VALUE
Unique User Identifier (Name ID)	user.userprincipalname [nameid-format:emailAddress] ...

Additional claims

CLAIM NAME	VALUE
cn	user.displayname ...
eduPersonPrincipalName	user.userprincipalname ...
mail	user.userprincipalname ...

- Result:

2

Attributes & Claims

cn	user.displayname
eduPersonPrincipalName	user.userprincipalname
mail	user.userprincipalname
Unique User Identifier	user.userprincipalname

Step 6: SAML Signing Certificate (Optional - only if you created a dedicated certificate for all your Azure AD applications)

You may decided to created a dedicated certificate for all your Azure AD applications. See the introduction note in the Prerequisites.

In this case, you now have to import it in your application.

You can skip this step if you didn't create a dedicated certificate for all your Azure AD and this is the first Azure AD application you create, but you'll break things later when you create your second application (because you cannot skip this step for your second application).


- Click on "Edit" on the "SAML Certificates" tile of your application:

3


Unique User Identifier user.userprincipalname

SAML Certificates


Token signing certificate

Status	Active	 Edit
Thumbprint	F469A7C853E485CDE13AE476DA6BD2BE09CBA3B6	
Expiration	8/28/2028, 10:02:40 PM	
Notification Email	admin@test-belnet.be	
App Federation Metadata Url	https://login.microsoftonline.com/44b8a7f1-9432-...	
Certificate (Base64)	Download	
Certificate (Raw)	Download	
Federation Metadata XML	Download	


Verification certificates (optional)

Required	No	 Edit
Active	0	
Expired	0	

- In the "SAML Signing Certificate" pane on the right, click "Import Certificate":

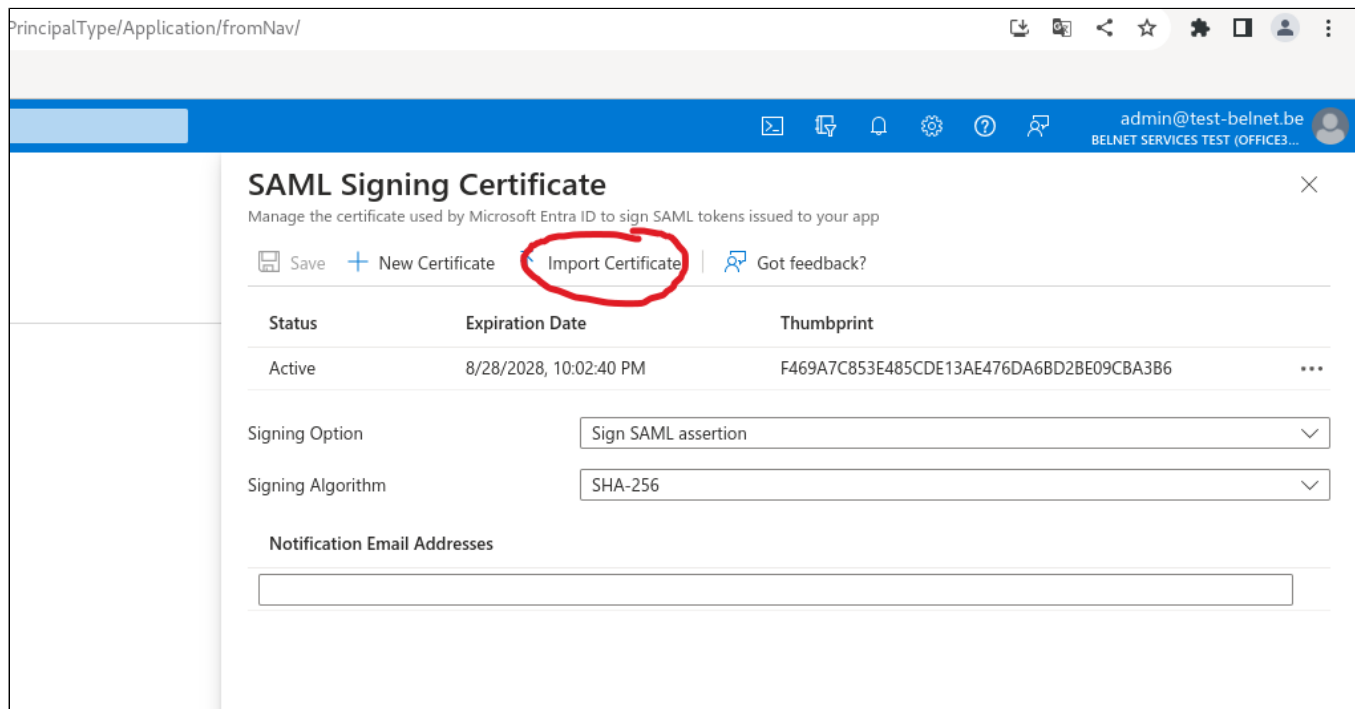

- Select the .pfx file you have created earlier, type its passphrase, and click on "Add":

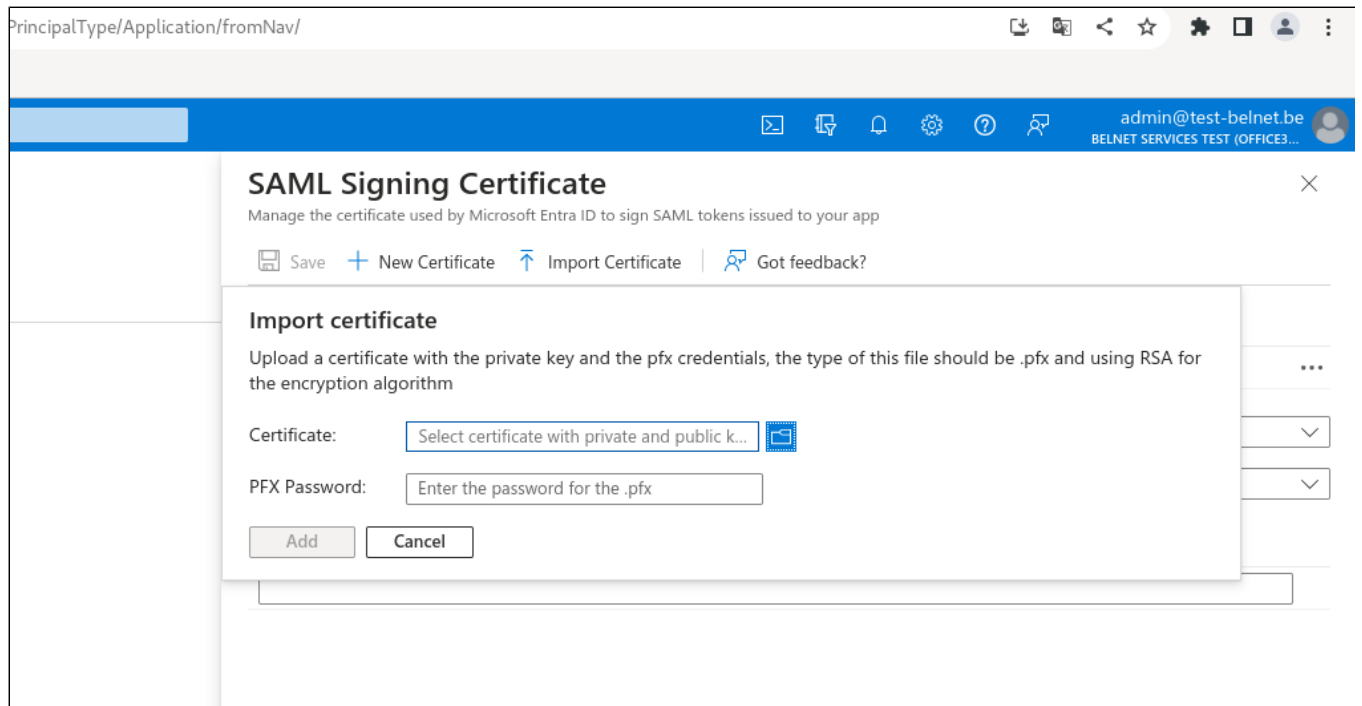

- Your certificate is now uploaded. Now, activate it and deactivate the autogenerated one by using their 3-dots menu:

PrincipalType/Application/fromNav/

admin@test-belnet.be
BELNET SERVICES TEST (OFFICE3...)

SAML Signing Certificate

Manage the certificate used by Microsoft Entra ID to sign SAML tokens issued to your app

Save + New Certificate ↑ Import Certificate | Got feedback?

✓ **Uploading Certificate**

The certificate has successfully been added to your application

Status	Expiration Date	Thumbprint	
Active	8/28/2028, 10:02:40 PM	F469A7C853E485CDE13AE476DA6BD2BE09CBA3B6	...
Inactive	10/14/2033, 3:07:08 PM	732E19358D4FBA9A543FEE7940EA1CCC2D89ABF2	...

Signing Option: Sign SAML assertion

Signing Algorithm: SHA-256

Notification Email Addresses

- Verify that the SAML Signing Certificate is Active

3 SAML Certificates

Token signing certificate

Status: **Active** [Edit](#)

Thumbprint: [Redacted]

Expiration: 5/22/2027, 10:02:49 PM

Notification Email: [Redacted]

App Federation Metadata Url: [Redacted]

Certificate (Base64) [Download](#)

Certificate (Raw) [Download](#)

Federation Metadata XML [Download](#)

Step 7: Send/Provide your App Federation Metadata URL to Belnet

3 SAML Certificates

Token signing certificate

Status: Active [Edit](#)

Thumbprint: [Redacted]

Expiration: 10/2/2027, 8:06:49 PM

Notification Email: [Redacted]

App Federation Metadata Url: <https://login.microsoftonline.com/...> [Download](#)

Certificate (Base64) [Download](#)

Certificate (Raw) [Download](#)

Federation Metadata XML [Download](#)

- Open a ticket by sending an email to [Belnet ServiceDesk](#) providing these details:
 - Subject: **FedSender: Add Azure IdP for <your Organisation name>**
 - In the message body, mention:
 - **Onboarding request to Belnet FedSender**
 - Technical Contact responsible for the IdP setup: **First name, Last name & email address**
 - Business service: **FED_APP_87: FedSender**
 - Assignment group: **Customer Relations**
 - Paste your **App Federation Metadata Url** (see above capture, 3rd window in SAML config for your app).

- Wait for confirmation from your Account Manager and/or Belnet's technical team.

Step 8: Test Single sign-on with Belnet FedSender

Once Belnet has added your IdP to the Service Provider (FedSender) configuration files, your IdP will be listed when you connect to Belnet FedSender.

Your organisation's employees will have to choose your organisation's name in the IdP list on fedsender.belnet.be in order to be able to authenticate via your IdP.

Example of the Idp selection menu during the login phase:



The screenshot displays the Belnet FedSender login page. At the top left is the Belnet logo with the tagline 'dedicated connectivity'. At the top right is the g-cloud logo. Below the logos is a language selector set to 'English'. A message states: 'If you were using FedSender before and your Organisation is not listed below, choose G-Cloud as authentication method.' Below this, a grey box contains the text: 'You have previously chosen to authenticate at **G-Cloud (All other users)**'. Below this box, there is a link 'Login at G-Cloud (All other users)' and a note 'IdP used during the previous login.' A red rectangle highlights the 'List of IdPs proposed for authentication' section. This section includes a search bar with the placeholder 'Incremental search...' and a list of IdPs: 'Belnet Staff IdP with MFA' and 'G-Cloud (All other users)' (which is marked with a red heart icon).



The choice of IdP in the discovery service is cached by the user's web browser.

If one of your user has selected the wrong IdP, clear the browser cache on the user's computer.